

Load-Bearing Sheet T130M-75L-930

Microprofiled top and bottom flanges and the optional high strength steel grade (S420GD) make T130M load-bearing sheet the strongest load-bearing sheet in its class.

The strength of the microprofiled T130M is validated by tests, which prove up to 20% increase in moment capacity compared to traditional non-microprofiled load-bearing sheets with similar height.


For the optimal structural dimensioning, use Ruukki's roof dimensioning software, [Poimu](#).

All of Ruukki's load-bearing sheets can be equipped with smart technology. The new [Ruukki® Roof Sensor system](#) tracks snow loads on roofs in real time, prevents dangerous situations and saves costs by making snow removal smarter. Read more about the benefits of smart roofs [here](#).



[SEND CONTACT REQUEST](#)

Properties

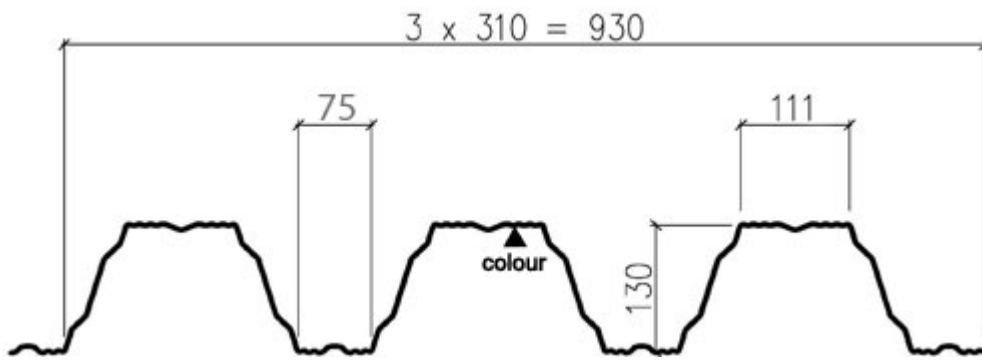

| | |
|-----------------|---|
| Model name | Load-Bearing Sheet T130M-75L-930 |
| Product code | T130M-75L-930 |
| Height | 130 mm |
| Width of valley | 75 mm |
| Width of crown | 111 mm |
| Effective width | 930 mm |
| Minimum length | 800 mm |
| Maximum Length | 18300 mm |
| Typical Span | >5 m |
| Quality control | Factory production control according to EN 1090-1 and EN 1090-4 |
| Tolerances | Dimensions and shape according to EN 1090-4, material thickness according to EN 10143 |
| CE Marking | EN1090-1 |
| Execution class | EXC1, EXC2, EXC3 |

Materials

| Material thickness (mm) | Steel grade | Zinc (g/m ²) | Surface treatment | Corrosion class, interior | Corrosion class, exterior | Colours | Weight (kg/m ²) |
|-------------------------|-------------|--------------------------|-------------------|---------------------------|---------------------------|------------|-----------------------------|
| 0.7 | S350 | Z275 | Galvanized | C2 | - | - | 8.86 |
| 0.7 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 8.86 |
| 0.7 | S350 | Z275 | Polyester 25 | C3 | C3 | RR20 | 8.86 |
| 0.8 | S350 | Z275 | Polyester 25 | C3 | C3 | RR33 | 10.13 |
| 0.8 | S350 | Z275 | Galvanized | C2 | - | - | 10.13 |
| 0.8 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 10.13 |
| 0.9 | S350 | Z275 | Galvanized | C2 | - | - | 11.40 |
| 0.9 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 11.40 |
| 1.0 | S350 | Z275 | Galvanized | C2 | - | - | 12.66 |
| 1.0 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 12.66 |
| 1.0 | S350 | Z275 | Polyester 25 | C3 | C3 | RR20, RR33 | 12.66 |
| 1.0 | S350 | Z275 | GreenCoat Pural | C4 | - | RR23 | 12.66 |
| 1.2 | S350 | Z275 | Galvanized | C2 | - | - | 15.19 |
| 1.2 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 15.19 |
| 1.2 | S350 | Z275 | Polyester 25 | C3 | C3 | RR33 | 15.19 |
| 1.5 | S350 | Z275 | Galvanized | C2 | - | - | 18.99 |
| 1.5 | S350 | Z100 | Polyester 15 | C2 | - | RR20 | 18.99 |

Note: The reverse sides of the colour coated sheets are painted as standard with 2-layer grey backside coating

Protection against corrosion

| Environment | Coating |
|---|--|
| Interior applications in environments with corrosivity category C1, C2 according to EN ISO 12944-2 standard and A1, A2 according to EN 10169 standard | Steel sheets with zinc coating of 100 g/m ² and with polyester coating SP 15, thickness 15 µm |
| Interior applications in environments with corrosivity category C1, C2, C3 according to EN ISO 12944-2 standard and A1, A2, A3 according to EN 10169 standard | Steel sheets with zinc coating of 275 g/m ² and with polyester coating SP 25, thickness 25 µm |

Design tools




Poimu software for dimensioning load-bearing sheets

Dimensioning software, Poimu, allows you to optimise product choice according to the Eurocode. Simply by defining some basic input data you can select a load-bearing sheet for their needs from Ruukki's selection. This quick optimisation tool covers 1-, 2-span and continuous structures and gives the exact solution as to what sheet should be used, as well as its length.

[Go to Poimu software](#)

Perforation

Standard degree of perforation (within the area perforated) is 15%. Perforations are 3 mm in diameter and their arrangement is based on an equilateral triangle with a side of 7.4 mm.

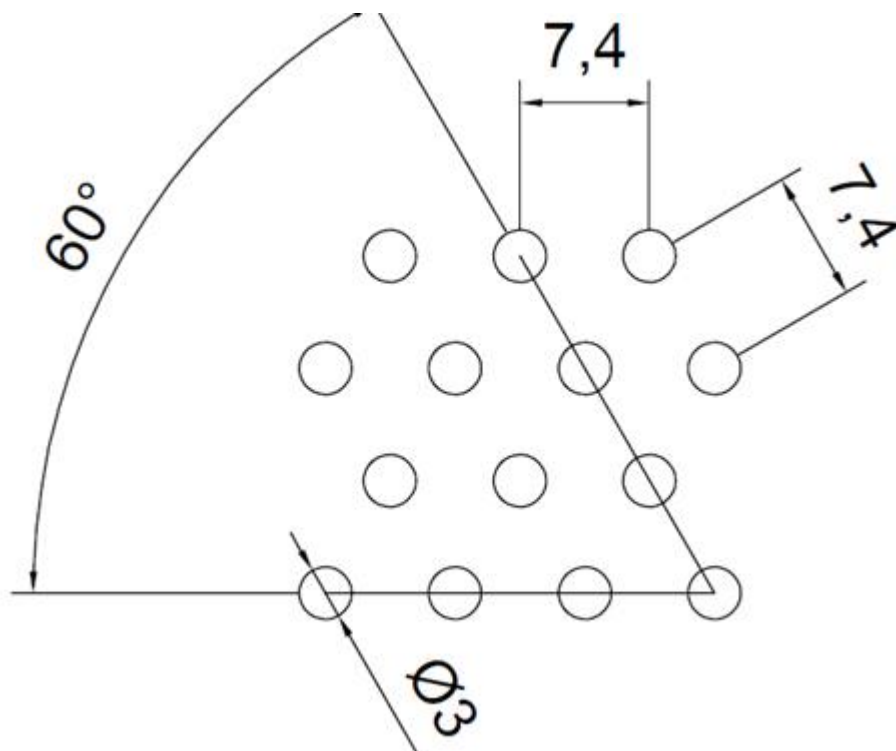

Perforation pattern Rv 3.0 - 7.4; degree of perforation = 15% within the area perforated.

Corrosion resistance

Perforated trapezoidal profiles ought to be applied in accordance with technical specifications drawn up to comply with obligatory standards, building regulations and assembly instructions.

Due to requirements regarding corrosion resistance perforated steel sheets may be applied only indoors and as follows:

Galvanized steel sheets with zinc coating 100 g/m² and organic coating SP 15 (polyester 15 µm) or Galvanized steel sheets with zinc coating 275 g/m² and organic coating SP 25 (polyester 25 µm) - in corroding medium C1 and C2 as per EN ISO 12944.

Load bearing profile application

Load bearing profiles are usually applied in multi layer roofing constructions. Web perforation leads to decreased strength parameters in the case of load bearing trapezoidal sheets. Use of Poimu software is recommended when determining the load capacity of perforated profiles: this software enables trapezoidal sheets within a structure to be dimensioned and optimized. For more information on Poimu visit software center and download [Poimu](#).

Sound absorption is similar to all profiles. However, small differences in sound insulation may occur dependent on profile height.

Low profile application

Acoustic profiled sheets have their whole surface perforated uniformly and are applied as interior facings of multi layer wall constructions and ceilings. They are characterized by a high sound insulation coefficient (150 - 4000 Hz). Application of perforated trapezoidal profiles results in

improved acoustic conditions in such buildings as canteens and sports or production halls. Regulation of reverberation time is also possible through application of an appropriate quantity of perforated sheets in relation to non-perforated sheets.

Acoustic absorption coefficient, absorption class

Acoustic absorption coefficient α_s was determined on the basis of ISO 354:2003. Absorption class was determined on the basis of EN 11654:1997.

Tables 1 - 3 present acoustic absorption coefficients and absorption class for the relevant trapezoidal profiles and a construction corresponding to them. Specimens are names according to trapezoidal profile.

Table 1. Absorption coefficient and class for construction

Absorption coefficient at octave bands

| Specimen | 63 H z | 125 H z | 250 H z | 500 H z | 1000 H z | 2000 H z | 4000 H z | Absorption class |
|---|-----------|------------|------------|------------|-------------|-------------|-------------|------------------|
| T20 - vapour barrier - rock wool 100mm -100kg/m ³ | 0.22 | 0.70 | 0.89 | 0.85 | 0.79 | 0.45 | 0.18 | D |
| T45 - vapour barrier - rock wool 100mm -100kg/m ³ | 0.25 | 0.73 | 0.93 | 0.89 | 0.84 | 0.48 | 0.18 | D |
| T130 - vapour barrier - rock wool 100mm -100kg/m ³ | 0.29 | 0.85 | 0.98 | 0.86 | 0.35 | 0.21 | 0.09 | E |
| T153 - vapour barrier - rock wool 100mm -100kg/m ³ | 0.28 | 0.83 | 0.97 | 0.85 | 0.41 | 0.22 | 0.08 | E |

Table 2. Absorption coefficient and class for construction

Absorption coefficient at octave bands

| Specimen | 63 H z | 125 H z | 250 H z | 500 H z | 1000 H z | 2000 H z | 4000 H z | Absorption class |
|----------|-----------|------------|------------|------------|-------------|-------------|-------------|------------------|
|----------|-----------|------------|------------|------------|-------------|-------------|-------------|------------------|

| | | | | | | | | |
|--|------|------|------|------|------|------|------|---|
| T20 - rock wool 100mm -100kg/m ³ | 0.18 | 0.74 | 0.94 | 0.92 | 0.93 | 0.94 | 0.82 | A |
| T20 - sound absorbing mat 120g/m ³ - vapour barrier - rock wool 100mm -100kg/m ³ | 0.20 | 0.63 | 0.82 | 0.84 | 0.88 | 0.70 | 0.46 | C |
| T153 - rock wool 100mm -100kg/m ³ | 0.23 | 0.63 | 0.82 | 0.84 | 0.88 | 0.70 | 0.46 | C |
| T153 - sound absorbing mat 120g/m ³ - vapour barrier - rock wool 100mm -100kg/m ³ | 0.24 | 0.80 | 0.97 | 0.86 | 0.49 | 0.30 | 0.20 | D |
| T153 - sound absorbing mat 120g/m ³ - sound absorbing mat 120g/m ³ - vapour barrier - EPS 60S Roof 100mm | 0.05 | 0.20 | 0.54 | 0.79 | 0.44 | 0.31 | 0.24 | D |

Table 3. Absorption coefficient and class for construction

Absorption coefficient at octave bands

| Specimen | 63 Hz | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000 Hz | 4000 Hz | Absorption class |
|---|-------|--------|--------|--------|---------|---------|---------|------------------|
| T153 - rock wool 50mm-150kg/m ³ - vapour barrier - rock wool 50mm -110kg/m ³ | 0.20 | 0.69 | 0.79 | 0.77 | 0.45 | 0.29 | 0.26 | D |

Material characteristics for specimen layers

- Ruukki trapezoidal profile
- Vapour barrier (0.25mm, 170g/m²)
- Mineral wool - description given for every specimen in the tables
- EPS 60S Roof (15kg/m³)

Roof sensor

Ruukki® Roof Sensor System

The purpose and aim of the Ruukki® Roof Sensor System is to measure and visualize the snow load on roofs constructed with Ruukki load bearing sheets. The system provides valuable information for safety and management decisions concerning the building. It's accessory for all Ruukki load bearing sheets and is available for new and old roofs that have access to the lower surface of the sheeting. The system is easy to install and use and there is no need for further monthly service fees.

Following corner stones are needed in the system

1. In structural design, **Ruukki's POIMU roof dimensioning program** must be used
2. Ruukki Roof Sensors location must be defined by the structural designer and sensors appropriately fitted by the installer
3. The parameters needed in system configuration are defined in POIMU program

After the sensors installation and system configuration, the system gives warnings when designers defined characteristic snow load level have been reached. Further warnings will be given well before load bearing sheeting is approaching its ultimate capacity. Warnings are given by visual light on the roof level and through user interface in web pages in a local network.

Documentation



Ruukki Roof Sensor infographics

PDF, 0.5 MB



Ruukki Roof Sensor gateway instructions

PDF, 391.1 KB



Ruukki Roof Sensor Poimu guide

PDF, 0.8 MB



Ruukki Roof Sensor users manual

PDF, 403.1 KB



Ruukki Roof Sensor installation instruction

PDF, 3.1 MB



Ruukki® Roof Sensor positioning table

DOCX, 94.8 KB



Ruukki Roof Sensor infographic

PDF, 0.5 MB

Technical documents



Safety anchor EC type examination certificate

PDF, 66.1 KB

Here you can find all technical documents related to Ruukki's load-bearing sheets. Documents are organised by document type. Click to enter document library.

Accessory
documents



Detail drawings



Installation
instructions



Maintenance
instructions



Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's load-bearing sheets. Documents are organised by document type. Click to enter document library.

**Declaration of
performance**



**Environmental
product declaration**

